




DESIGNED FOR PERFECTION

UV-BOX series supports deep disinfection of a wide range of objects and tools.

Proper design and calibration ensure delivery of the necessary dose to achieve the highest possible disinfection level.

The chambers are designed with safety measures to prevent exposure to UV light during operation.

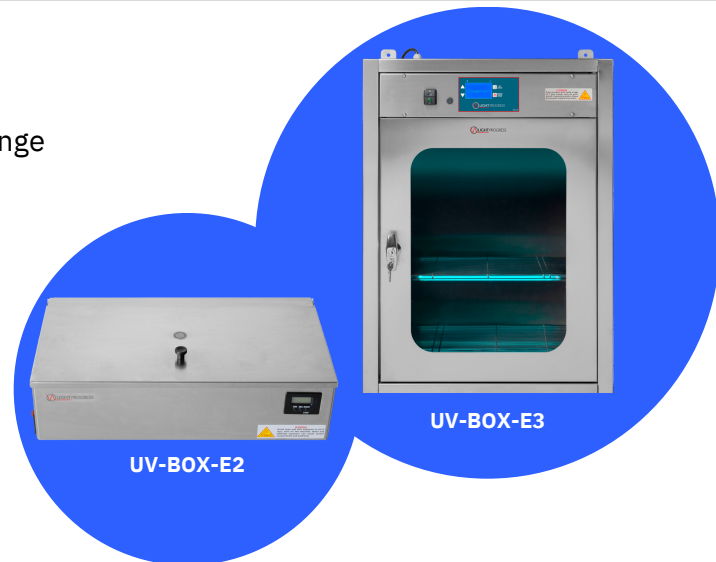

KEY PRODUCT FEATURES

- **Application**, suitable for various settings, including healthcare facilities, laboratories, food processing industries, hospitality industry, and more
- **Fit Anywhere**, available with multiple doors, wall-mounted or floor standing.
- **Increased Disinfection Performance**, with High-Output UV-C lamps (253,7 nm) and internal wall reflection.
- **Built to Last**, in high-quality Stainless Steel AISI 304, all material tested for UV resistance.
- **Easy to use**, set disinfection cycles with a settable timer and automatic switching ON-OFF (automatic switch only on E3 models).

UV-BOX-E2



UV-BOX-E3-R



UV-BOX-E3-C



Healthcare sector
(hospitals - clinics)



HVAC -
Air conditioning systems



Food and pharmaceutical
production industry



HOSPITALITY
INDUSTRY



Schools -
Offices - Shops



Large environments






Gyms -
Wellness centres



Transport

TECHNICAL TABLE

	UV-BOX		
	UVBOXE2/40HNXT	UVBOXE3/40HNXC	UVBOXE3/40HNXR
			
LAMP LIFE (hours)*	≤ 18.000	≤ 18.000	
REPLACEMENT LAMP (MAXIMUM EVERY 2 YEARS)	n°2 CHS-40WH	n°3 CHS-40WH	n°3 CHS-40WH
LAMP POWER (W)	80	120	120
DIMENSIONS l x p x h	129 x 509 x 275 mm (5 x 20 x 11 in)	750 x 550 x 350 mm (30 x 22 x 14 in)	750 x 550 x 350 mm (30 x 22 x 14 in)
INTERNAL DIMENSIONS l x p x h	89 x 469 x 213 mm (4 x 18 x 8 in)	600 x 500 x 310 mm (24 x 20 x 12 in)	600 x 500 x 310 mm (24 x 20 x 12 in)
INSTALLATION	Tabletop	Tabletop and Wall mounted	Tabletop and Wall mounted
WEIGHT	5.5 Kg 12 Lb	22 Kg 49 Lb	22 Kg 49 Lb
EQUIPMENT	n°1 inox shelf	n°1 inox shelves with knives holder	n°2 inox shelves
PROTECTION RATING	IP 20	IP 20	
ELECTRICAL CONNECTION	Power supply cable 3x1mm², 2m length; SCHUKO plug	Power supply cable 3x1mm², 2m length; SCHUKO plug	

* continuous operation

TROUBLE-FREE INTEGRATION AND INSTALLATION



- **The anti-UV LEXAN®** window allow you to check the proper operation at any time.
- **-C model** includes a special knives-holder rack to treat knives without any shadows on the blades.
- **UVLON™** available to avoid glass falling in case of accidental break (optional)


TECHNICAL DRAWINGS

Every Light Progress Product is available in detailed DWG and STEP files for your design-in and specification clarity.

VIEW or DOWNLOAD now



MICROBIAL TESTS AND EFFICACY

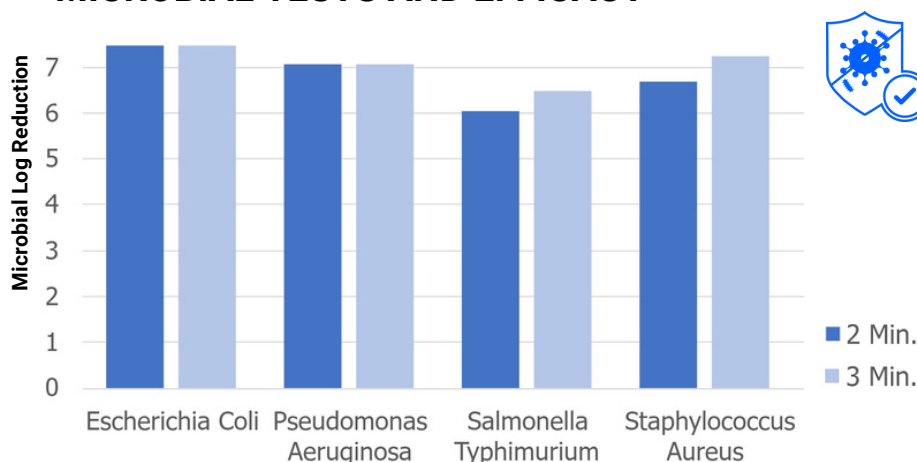


Up-to log₆ microbial reduction with a 3 minutes treatment

Light Progress customers rely on our extensive history of third party testing and proven efficacy to meet any level of disinfection validated against literally any virus or microorganism.

We understand your need to meet Regulatory Requirements and Industrial Standards as we help you achieve microbial load reduction using our UV systems.

 **Light Progress Group SRL**
Anghiari (AR) ITALIA
P: (+39) 0575 749255
E: info@lightprogress.it
W: www.lightprogress.it

 **Light Progress GmbH**
Aschaffenburg DEUTSCHLAND
P: (+49) 6021-8663700
E: info@lightprogress.it
W: www.lightprogress.de

 **Light Progress LLC**
Austin, TX USA
P: (+1) 833-882-4255
E: americas@lightprogress.it
W: www.lightprogress.us

OFFICIALLY DISTRIBUTED BY:



Component s.r.o.
Bulharská 42, Trnava
IČO: 50 545 861
IČ DPH: SK220375312
Tel. 09037633 400
WWW.COMPONENT.SK