
VINNANT-ANTENA FOR IOT OPERATIONS COLLINEAR, TYPE CC868/8-PEL, N CONNECTOR

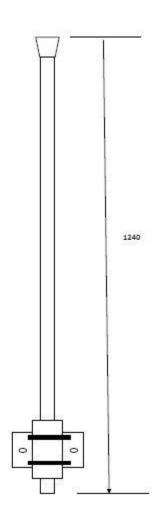

VINNANT CC868/8-PEL
PROFESSIONAL SERIES,EXTENDED LIFE
holder type Z5

COLLINEAR SKIRTED DIPOLE

tuned for 868Mhz

awesome gain of 10,14DBI

DC GROUNDED, CONNECTOR SHOW SHORT WHEN MEASURING, GREAT STATIC PROTECTION AND LESS INTERFERENCE FROM GSM NETWORKS

ANTENNA IS using low loss N FEMALE connector

housed in COATED FIBERGLASS radome UV stable antenna is designed for HIGH wind loading

The installation notice:

Make sure antenna is placed as high as possible with no nearby objects at least 50cm away from the other antenna. Antenna need to be on the top of the pole and cannot be placed in the middle of the pole, unless you use the horizontal stand-off arm, at least FOREMENTIONED 50cm apart from the pole. Use the high quality 50Ohm low loss cable like H155 and within 10m of lenght maximum. Don't use the satellite cable as being 75Ohm neither RG58 which is not suitable for this frequency and have high losses. Don't use any SO239-PL259 as pigtails for this high frequency.

If you have installation problems or questions please don't hesitate to contact us.

Technical parameters:

Length 124cm antenna
Gain 10,14DBI/8Dbd
Weight 0,64kg
pole diameter up to 50mm,min 20mm
connector N female

TUNED AT 868MHZ swr LESS THAN 1.3:1 @ 868 Mhz BANDWIDTH 5MHZ /+ - 2.5MHZ/ IMPEDANCE 50OHM

radiation pattern H plane 360 degrees radiation pattern E plane 20 degrees